


CORRIDOR 400 GLOBE - PERFORERINGSDATA


PERFORERINGSDETALJER

Perforeringstype	Globe - 6 mm runde hull
Perforeringsprosent	10,6 %
Perforeringsmønster	G1

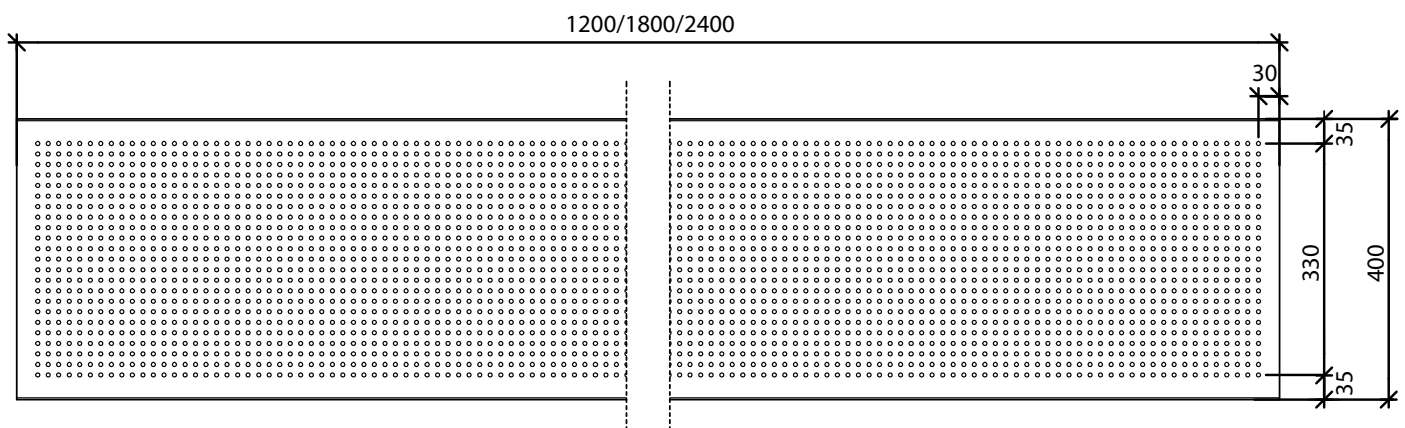

ABSORPSJONSKOEFFISIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,55	0,80	0,80	0,65	0,60	0,55

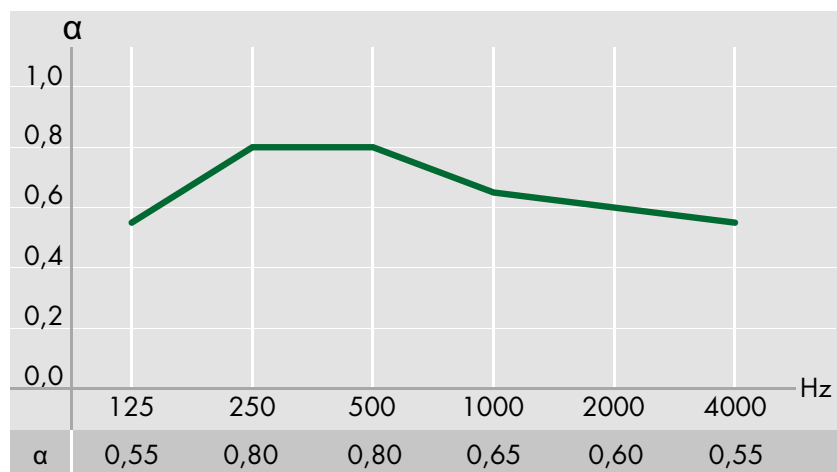

Ved 200 mm og 50 mm mineralull