


CORRIDOR 400 QUADRIL - PERFORERINGSDATA


PERFORERINGSDETALJER

Perforeringstype	Quadril - 12x12 mm kvadratiske hull
Perforeringsprosent	14,2 %
Perforeringsmønster	Q1

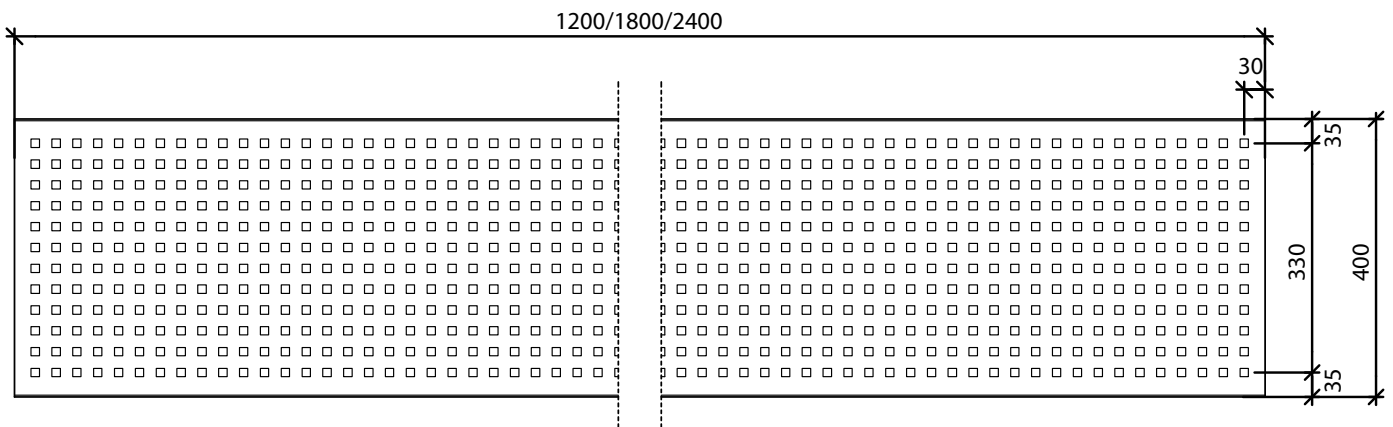

ABSORPSJONSKOEFFISIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,55	0,80	0,85	0,75	0,70	0,60

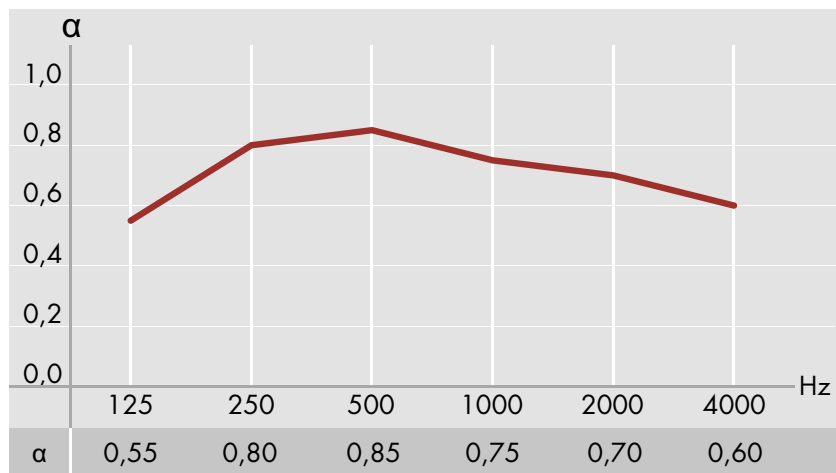

Ved 200 mm og 50 mm mineralull